Motor Data Sheet

BROOK CROMPTON
Keeping Industry Turning

Product information in accordance with commission regulation (EU) no. 2019/1781, annex I - item no. 2				
1	Rated efficiency at rated load	load	50 Hz	60 Hz
		100%	86.7	-
		75%	87.0	-
		50%	86.0	-
2	Efficiency level:		IE3	-
3	Manufacturer name / trade mark / Commercial registration no. / address:			
	Brook Crompton UK Ltd registration number 4305426			
	Registered Office: St Thomas' Road, Huddersfield, HD1 3LJ			
4	Motor type:		AC INDUCTION	
	Motor part number:		**100W248400T**	
5	Number of poles:		4	
6	Rated power output (kW):		2.2	-
7	Rated input frequency (Hz):		50	-
8	Rated voltage (V):		230 / 400	-
9	Rated speed (min-^{1}):		1450	-
10	Phase:		3	
11	Altitudes above sea-level:		1000m	
	Ambient air temperatures:		-20°C to +40°C	
	Water coolant temperature:		-	
	Maximum operating temp:		-	
	Potentially explosives atmosphere:		NO (SAFE AREA)	
12	Exempt from regulation:		NO	
	Reason of exemption:		-	
13	Power losses: Power losses in % of the rated output at the following operation points (speed vs. torque values):	(90/100)	NOT APPLICABLE	
		(90/50)	NOT APPLICABLE	
		(50/100)	NOT APPLICABLE	
		(50/50)	NOT APPLICABLE	
		(50/25)	NOT APPLICABLE	
		(25/100)	NOT APPLICABLE	
		(25/25)	NOT APPLICABLE	

		50 Hz	60 Hz
Power factor:	100%	0.79	-
	75%	0.70	-
	50%	0.57	-
Phase connection:		DELTA / STAR	-
Rated current (A):		8.1 / 4.6	-
Duty:		S1	-
Rated torque (Nm):		14.5	-
Starting current (Ia/In):		7.3	-
Starting torque (Ma/Mn):		3.2	-
Breakdown torque (Mk/Mn):		3.3	-

	-

Frame size :	WP-DA100LRF
Housing material:	ALUMINIUM
Mounting:	FOOT, HORIZONTAL (IM1001)(B3)
Degree of protection:	55
Method of cooling:	IC411
Thermal class:	155(F)
Motor weight:	29.5 kg (approx.)

Terminal box position:	TOP
Cable entry:	2 x CM20
Cable gland:	NOT FITTED
Terminal board pin size:	M5

DE bearing:	6206-2Z/C3
NDE bearing:	6205-2Z/C3
Regreasing facility:	GREASED FOR LIFE
Grease:	POLYUREA

Balance grade:	1.6	mm/s
Rotor inertia:	0.0106	kgm^2
Rotation direction:	CLOCKWISE AT DRIVE END	


Paint system:	C2
Colour:	RAL 5021 (WATER BLUE)

Sound pressure 50Hz:	54	dB(A)
Sound pressure 60Hz:	-	dB(A)

Winding protection:	-	-		
Heaters:	-	V	-	W

Hazardous area marking:	Ex n/a
Certificate number:	n/a
tE time:	n/a

Typical Torque and Current Vs Speed curve

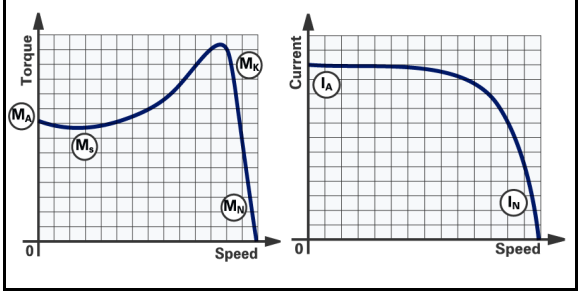

Remarks:

.
.
.

All data subject to tolerance

This document is exclusive property of Brook Crompton UK
Reprinting is not allowed without written authorization of Brook Crompton UK
Subject to change without notice